



Data Sheet 4540028

Product: RS Smart Dimmer UNI rotary pure white
EI-number: 4540028
Mat.no: EKO30168
EAN: 27020161301683
Packing: 1
Color:



Product description: RS Nordic SmartDim universal turn is a dimmer to control the luminaires in a room. It can be operated directly on the dimmerknob or via the ELKO Smart App. The dimmer can control LED, ohmic, inductive or capacitive load. It operates with the L-phase only. RS Nordic is produced in a color resistant material in purewhite RAL9003 color with the well known RS design.

Technical specifications: Color: Purewhite RAL9003
Voltage: 230V AC / 50 Hz
Standby: Max. 0,4W
Fuse protection: 16A Circuit breaker
Frequency band: 2,4 GHz
Transmission capacity: Max. 2,5 mW
IP degree: IP20
Operating temperature: 0°C - 35°C
Communication protocol: Zigbee 3.0
Connecting terminals: Screw terminals 2x2,5mm² solid or stranded types
Torque: 0,5Nm
Extension units: Mechanical single push-buttons (unlimited)
Electronic overload protection
Overheating protection
Short-circuit protection
Load:
LED: RC mode - 7 - 100VA
LED: RL mode - 7 - 20VA
Incandescent lamps: 14-200W
230V Halogen lamps: 14-150W
Electronic transformer: 14-150VA

Operation:

On/Off: Push the dimmerknob to turn lights on and off

Dimming: Turn dimmerknob right or left to dim lights up or down


ELKO AS

E-mail: elko@elko.no
Internet: www.elko.no
Bank: 6219.05.15880
Org.no.: NO 911 382 563 MVA


ELKO Front office
Sandstuveien 68, NO-0680 Oslo
P.O.Box 6598 Etterstad, NO-0607 Oslo
Tel.: +47 67 80 73 00
Fax: +47 67 80 73 01

ELKO Plant
Sporvind Industriområde, NO-3340 Åmot
Tel.: +47 32 78 91 00
Fax: +47 32 78 91 01

Size

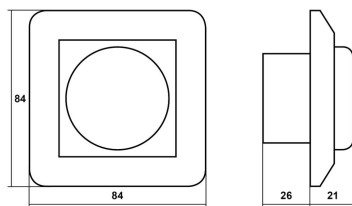

Wiring diagram



ELKO AS

E-mail: elko@elko.no
Internet: www.elko.no
Bank: 6219.05.15880
Org.no.: NO 911 382 563 MVA

ELKO Front office
Sandstuveien 68, NO-0680 Oslo
P.O.Box 6598 Etterstad, NO-0607 Oslo
Tel.: +47 67 80 73 00
Fax: +47 67 80 73 01

ELKO Plant
Sporpind Industriområde, NO-3340 Åmot
Tel.: +47 32 78 91 00
Fax: +47 32 78 91 01