



Data Sheet 1471455

Product: RS16/1-10V LRE PH
El-number: 1471455
Mat.no: EKO03970
EAN: 7020160397010
Packing: 1
Color: Polarwhite



Product description: 1-10Vdimmer for lightarmatures equipped with 1-10V signal input. On/Off by pushing the button, dim by turning knob. The dimming range is 1-100%. The maximum- and minimumlevel must be adjusted when all units and lamps are connected.

The dimmer has a an galvanic separated internal switch, wich cuts off the voltage in the lamp. Optional to connect the arrow terminals, but the lamp will then not be voltage free when the dimmer is off. Max load over the switch is 6A ohmic and 2A flourecent lights.

The dimmer can be surface mounted in a combination with a surface box 33mm deep. If the dimmer is installed in a combination frame with several holes, the supplied frame must be removed.

Technical specifications: Dimmertype: Mechanic Transistor dimmer
Voltage: 230 V/50 Hz.
Max Load switch: 6A ohmic load.
Max Load switch: 2A inductive or capacitive load.
Max Load 1-10V: 200mA
Fuse: 6,3A.
Surface mounted box: 33mm
Operate:
-On/off: Push.
-Dim 1-10V: Turn knob
-Dimming area: 1-100%
Color: Polarwhite
IP20
Depth in box: 29mm


ELKO AS

E-mail: elko@elko.no
Internet: www.elko.no
Bank: 6219.05.15880
Org.no.: NO 911 382 563 MVA


ELKO Front office
Sandstuveien 68, NO-0680 Oslo
P.O.Box 6598 Etterstad, NO-0607 Oslo
Tel.: +47 67 80 73 00
Fax: +47 67 80 73 01

ELKO Plant
Sporpind Industriområde, NO-3340 Åmot
Tel.: +47 32 78 91 00
Fax: +47 32 78 91 01

Size

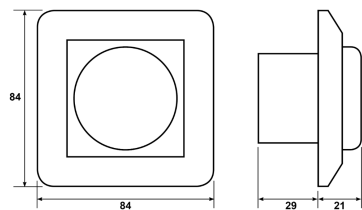

Wiring diagram



ELKO AS

E-mail: elko@elko.no
Internet: www.elko.no
Bank: 6219.05.15880
Org.no.: NO 911 382 563 MVA

ELKO Front office
Sandstuveien 68, NO-0680 Oslo
P.O.Box 6598 Etterstad, NO-0607 Oslo
Tel.: +47 67 80 73 00
Fax: +47 67 80 73 01

ELKO Plant
Sporvind Industriområde, NO-3340 Åmot
Tel.: +47 32 78 91 00
Fax: +47 32 78 91 01